



6-port Industrial Managed PoE Ethernet Switch



User's Manual

Version 1.2

Table of Content

Getting to Know Your Switch.....	3
1.1 About the LNP-602N Managed Industrial Switch.....	3
1.2 Software Features	3
1.3 Hardware Features.....	3
Hardware Installation.....	4
2.1 Installing Switch on DIN-Rail	4
2.1.1 Mount LNP-602N Series on DIN-Rail	4
2.2 Wall Mounting Installation	5
2.2.1 Mount LNP-602N Series on wall.....	5
Hardware Overview.....	7
3.1 Front Panel	7
3.2 Front Panel LEDs	9
3.3 Bottom Panel	9
3.4 Rear Panel	10
Cables	11
4.1 Ethernet Cables.....	11
4.1.1 100BASE-TX/10BASE-T Pin Assignments	11
4.2 Fibers	12
WEB Management.....	13
5.1 Configuration by Web Browser	13
5.1.1 About Web-based Management	13
5.1.2 Basic Setting	15
5.1.2.1 Switch setting	15
5.1.2.2 Admin Password	15
5.1.2.3 IP configuration	16
5.1.2.4 SNTP Configuration	17
5.1.2.5 Backup & Restore	19
5.1.2.6 Upgrade Firmware.....	20
5.1.2.7 Factory Default	21
5.1.2.8 System Reboot.....	21
5.1.3 Port Configuration	22

5.1.3.1	Port Control	22
5.1.3.2	Port Status	22
5.1.4	Redundancy	23
5.1.4.1	Fast Recovery Mode	23
5.1.4.2	Redundant Ring	23
5.1.4.3	RSTP	25
5.1.5	SNMP Configuration	27
5.1.5.1	SNMP – Agent Setting	27
5.1.5.2	SNMP –Trap Setting	28
5.1.6	VLAN	29
5.1.6.1	VLAN Configuration – Port Based	29
5.1.7	Warning	30
5.1.7.1	Fault Alarm	30
5.1.8	Front Panel	35
5.1.9	Save Configuration	35
5.1.10	LLDP	36
5.1.11	Power over Ethernet (P.O.E.)	36
5.1.12	Auto-Ping Check	38
5.1.13	Schedule	38
Technical Specifications		40

Getting to Know Your Switch

1.1 About the LNP-602N Managed Industrial Switch

The LNP-602N switch is a cost-effective and powerful industrial switch with many features. These switches can work under wide temperature and dusty environment and humid condition. The LNP-602N support Power over Ethernet, a system to transmit electrical power with data to remote devices over standard twisted-pair cable. The LNP-602N switch has 4 X 10/100TX PSE (Power Sourcing Equipment) ports which are fully compliant with IEEE 802.3af standard.

1.2 Software Features

- World's fastest Redundant Ethernet Ring (Recovery time < 10ms over 250 units connection)
- Supports Ring Coupling, Dual Homing and RSTP over Redundant Ring
- Support fast recovery mode
- Easy web configuration

1.3 Hardware Features

- Wide Operating Temperature: -40 to 75° C
- Storage Temperature: -40 to 85° C
- Operating Humidity: 5% to 95%, non-condensing
- 4 10/100Base-T(X) Ethernet port with PSE provides up to 25 watts
- 10/100Base-T(X) Ethernet port
- 100Base-FX Fiber port


Hardware Installation

2.1 Installing Switch on DIN-Rail


Each switch has a DIN-Rail kit on rear panel. The DIN-Rail kit helps switch to fix on the DIN-Rail. It is easy to install the switch on the DIN-Rail:

2.1.1 Mount LNP-602N Series on DIN-Rail

Step 1: Slant the switch and mount the metal spring to DIN-Rail.

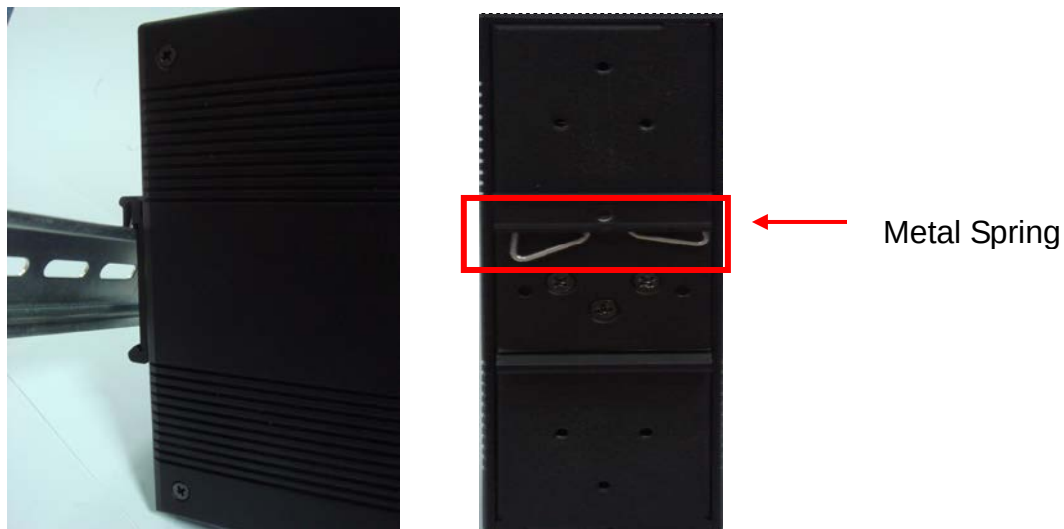

Step 2: Push the switch toward the DIN-Rail until you heard a “click” sound.

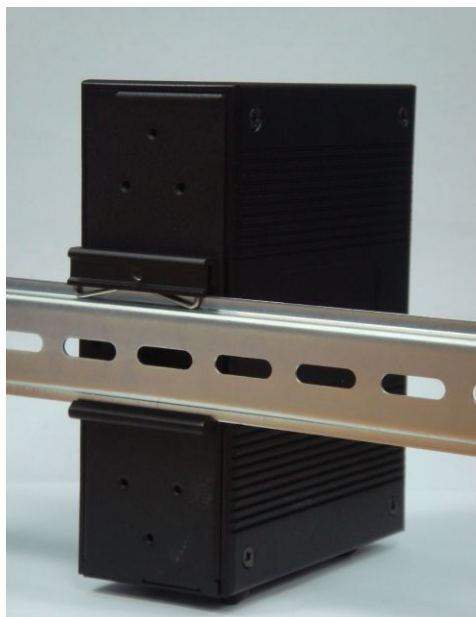


2.2 Wall Mounting Installation

Each switch has another installation method for users to fix the switch. A wall mount panel can be found in the package. The following steps show how to mount the switch on the wall:

2.2.1 Mount LNP-602N Series on wall


Step 1: Remove DIN-Rail kit.

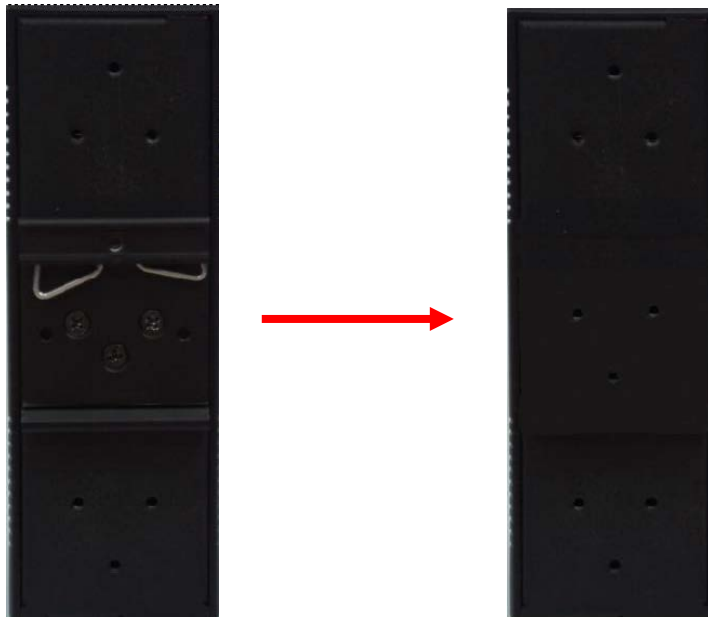

Step 2: Use 6 screws that can be found in the package to combine the wall mount panel. Just like the picture shows below:



The screws specification shows in the following two pictures. In order to prevent switches from any damage, the screws should not be larger than the size that is used in the switch.



Step 3: Mount the combined switch on the wall.




Hardware Overview

3.1 Front Panel

The following table describes the labels that stick on the LNP-602N.

Port	Description
10/100 RJ-45 fast Ethernet ports	10/100Base-T(X) RJ-45 fast Ethernet ports support auto-negotiation. Default Setting : Speed: auto Duplex: auto Flow control : disable
Fiber port	100BaseFX
P.O.E. Port	Port 1 ~ 4 contain PSE function compliant with IEEE802.3af P.O.E. specifications.
Reset	Push reset button 2 to 3 seconds to reset the switch. Push reset button 5 second to reset the switch into Factory Default .

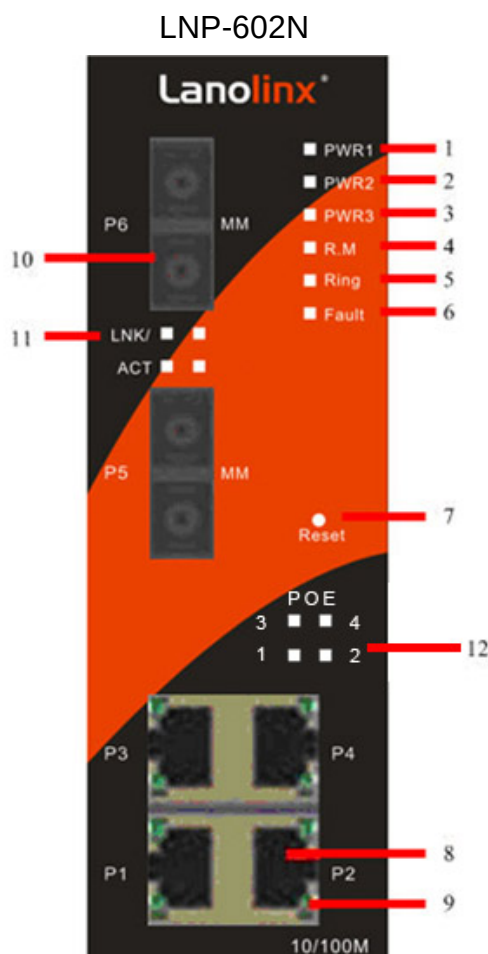

1. LED for PWR1. When the PWR1 links, the green led will be light on.
2. LED for PWR2. When the PWR2 links, the green led will be light on.
3. LED for PWR3. When the PWR3 links, the green led will be light on.
4. LED for R.M (Ring master). When the LED light on, it means that the switch is the ring master of Redundant Ring.
5. LED for Ring. When the led light on, it means the Redundant Ring is activated.
6. LED for Fault Relay. When the fault occurs, the amber LED will be light on.
7. Reset button. Push the button 3 seconds for reset; 5 seconds for factory default.
8. 10/100Base-T(X) Ethernet ports.
9. LED for Ethernet ports status.
10. 100BaseFX fiber port.
11. LNK/ACT LED for fiber port.
12. LED for P.O.E. power supplied.


3.2 Front Panel LEDs

LED	Color	Status	Description
PWR1	Green	On	DC power module 1 activated.
PWR2	Green	On	DC power module 2 activated.
PWR3	Green	On	Power jack activated.
R.M	Green	On	Ring Master.
Ring	Green	On	Ring enabled.
		Slowly blinking	Ring topology has problem
		Fast blinking	Ring work normally.
Fault	Amber	On	Fault relay. Power failure or Port down/fail.
10/100Base-T(X) Fast Ethernet ports			
LNK / ACT	Green	On	Port link up.
		Blinking	Data transmitted.
Full Duplex	Amber	On	Port works under full duplex.
P.O.E.	Green	On	P.O.E. activated
100Base-FX Fiber ports			
ACT	Green	Blinking	Data transmitted.
LNK	Amber	On	Port link up.

3.3 Bottom Panel

The bottom panel components of LNP-602N are showed as below:

1. Terminal block includes: PWR1, PWR2 (+48V DC) and Relay output (1A@24VDC).
2. Power jack for PWR3 (+48VDC).

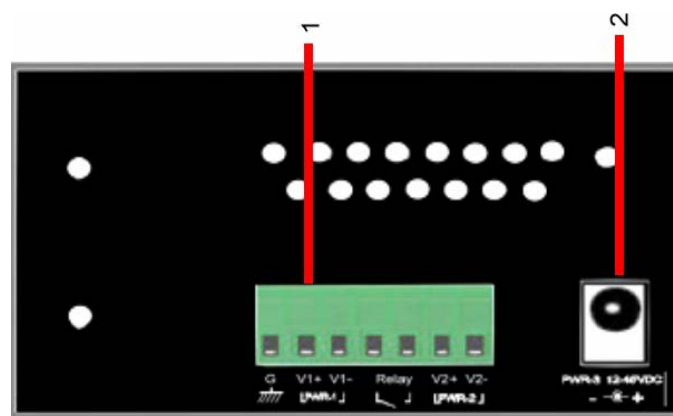


LNP-602N power connection

3.4 Rear Panel

The rear panel components of LNP-602N are showed as below:

1. Screw holes for wall mount kit.
2. Din-Rail kit

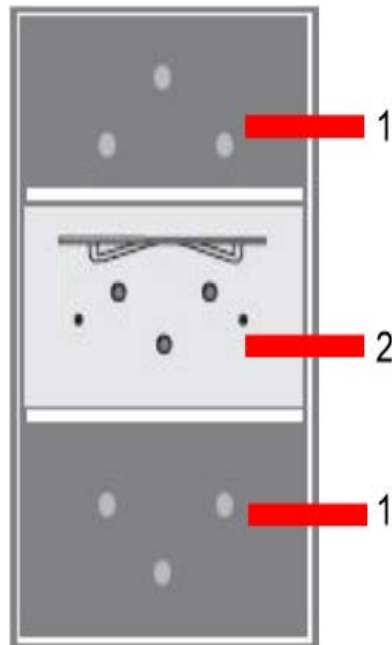

Cables

4.1 Ethernet Cables

The LNP-602N switches have standard Ethernet ports. According to the link type, the switches use CAT 3, 4, 5, 5e UTP cables to connect to any other network device (PCs, servers, switches, routers, or hubs). Please refer to the following table for cable specifications.

Cable Types and Specifications

Cable	Type	Max. Length	Connector
10BASE-T	Cat. 3, 4, 5 100-ohm	UTP 100 m (328 ft)	RJ-45
100BASE-TX	Cat. 5 100-ohm UTP	UTP 100 m (328 ft)	RJ-45

4.1.1 100BASE-TX/10BASE-T Pin Assignments

With 100BASE-TX/10BASE-T cable, pins 1 and 2 are used for transmitting data, and pins 3 and 6 are used for receiving data.

RJ-45 Pin Assignments

Pin Number	Assignment
1	TD+
2	TD-
3	RD+
4	P.O.E. power input +
5	P.O.E. power input +
6	RD-
7	P.O.E. power input -
8	P.O.E. power input -

The LNP-602N switches support auto MDI/MDI-X operation. You can use a straight-through cable to connect PC and switch. The following table below shows the 10BASE-T/ 100BASE-TX MDI and MDI-X port pin outs.


MDI/MDI-X pins assignment

Pin Number	MDI port	MDI-X port
1	TD+(transmit)	RD+(receive)
2	TD-(transmit)	RD-(receive)
3	RD+(receive)	TD+(transmit)
4	P.O.E. power input +	P.O.E. power input +
5	P.O.E. power input +	P.O.E. power input +
6	RD-(receive)	TD-(transmit)
7	P.O.E. power input -	P.O.E. power input -
8	P.O.E. power input -	P.O.E. power input -

Note: "+" and "-" signs represent the polarity of the wires that make up each wire pair.

4.2 Fibers

The following two models, LNP-602N-MM, LNP-602N-SS30, have fiber optical ports. The fiber optical ports are in multi-mode (0 to 2 km, 1310 nm in 50/125 μ m, 62.5/125 μ m) and single-mode (9/125 μ m) with SC connector. Please remember that the TX port of Switch A should be connected to the RX port of Switch B.

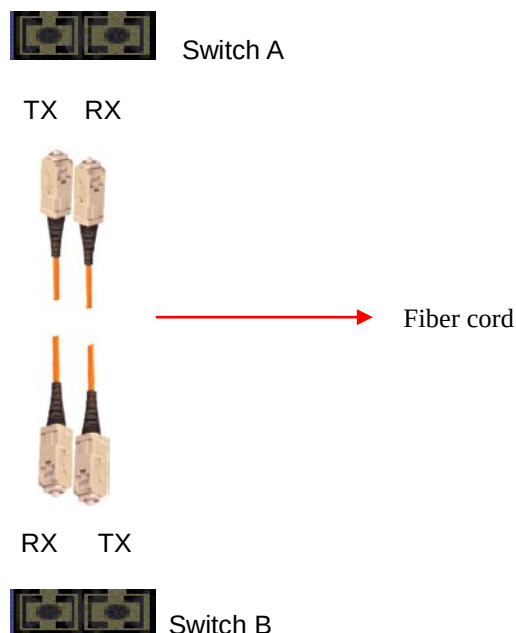

WEB Management



5.1 Configuration by Web Browser

This section introduces the configuration by Web browser.

5.1.1 About Web-based Management

An embedded HTML web site resides in flash memory on the CPU board. It contains advanced management features and allows you to manage the switch from anywhere on the network through a standard web browser such as Microsoft Internet Explorer.

The Web-Based Management function supports Internet Explorer 5.0 or later. It is based on Java Applets with an aim to reduce network bandwidth consumption, enhance access speed and present an easy viewing screen.

Note: By default, IE5.0 or later version does not allow Java Applets to open sockets. You need to explicitly modify the browser setting in order to enable Java Applets to use network ports.

Preparing for Web Management

The default value is as below:

IP Address: **192.168.10.1**

Subnet Mask: **255.255.255.0**

Default Gateway: **192.168.10.254**

User Name: **admin**


Password: **admin**

System Login

1. Launch the Internet Explorer.
2. Type http:// and the IP address of the switch. Press "**Enter**".




3. The login screen appears.
4. Key in the username and password. The default username and password is **“admin”**.
5. Click **“Enter”** or **“OK”** button, then the main interface of the Web-based management appears.

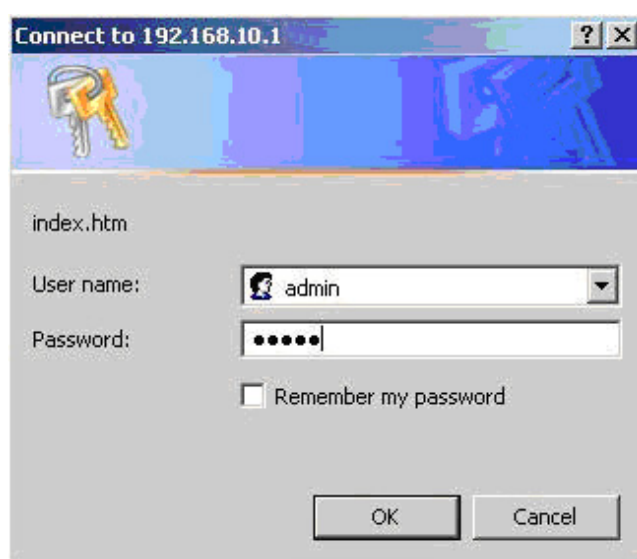

Login screen


Main Interface

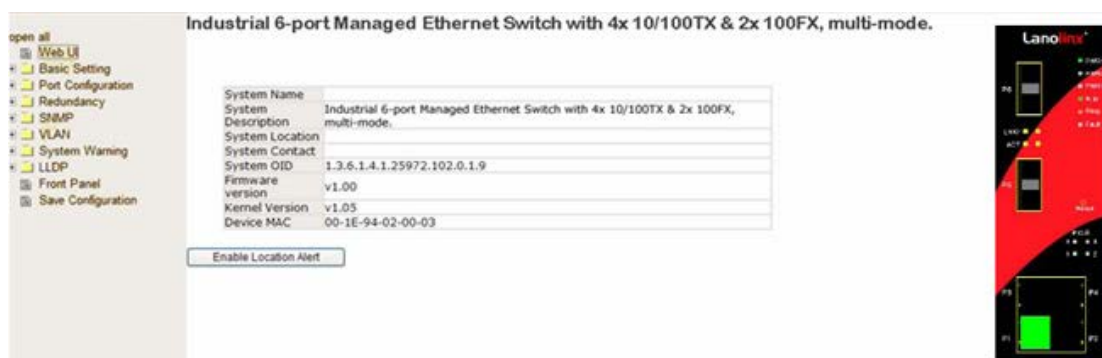

Main interface

5.1.2 Basic Setting

5.1.2.1 Switch setting

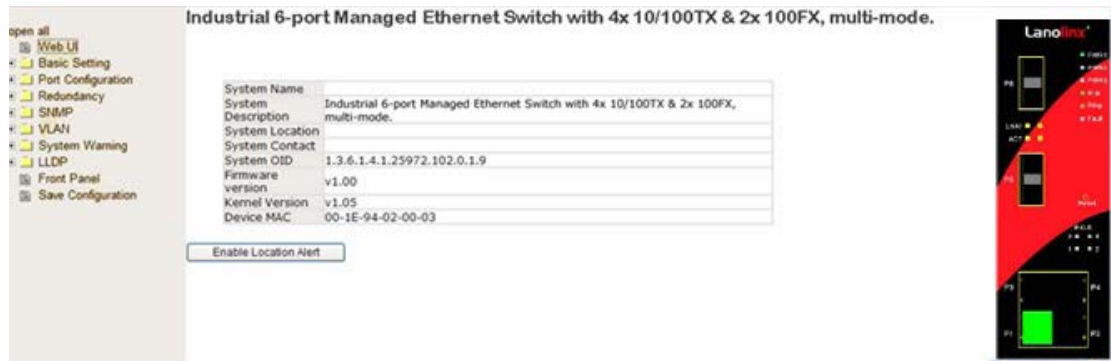

Switch setting interface

The following table describes the labels in this screen.

Label	Description
System Name	Assign the name of switch. The maximum length is 64 bytes
System Description	Display the description of switch.
System Location	Assign the switch physical location. The maximum length is 64 bytes
System Contact	Enter the name of contact person or organization
Firmware Version	Display the switch's firmware version
Kernel Version	Display the kernel software version
MAC Address	Display the unique hardware address assigned by manufacturer (default)

5.1.2.2 Admin Password

Change web management login username and password for the management security



Admin Password interface

The following table describes the labels in this screen.

Label	Description
User name	Key in the new username (The default is “ admin ”)
New Password	Key in the new password (The default is “ admin ”)
Confirm password	Re-type the new password.
Apply	Click “ Apply ” to activate the configurations.

5.1.2.3 IP configuration

You can configure the IP Settings and DHCP client function through IP configuration.

The screenshot shows the 'IP Configuration' web interface. At the top, the title 'IP Configuration' is displayed. Below the title, there is a section for 'DHCP Client' with a dropdown menu currently set to 'Disable'. Underneath, there are several input fields: 'IP Address' containing '192.168.10.1', 'Subnet Mask' containing '255.255.255.0', 'Gateway' containing '192.168.10.254', 'DNS1' (empty), and 'DNS2' (empty). At the bottom of the form, there are two buttons: 'Apply' and 'Help'.

IP Configuration interface

The following table describes the labels in this screen.

Label	Description
DHCP Client	To enable or disable the DHCP client function. When DHCP client function is enabling, the switch will assign the IP address from the network DHCP server. The default IP address will be replaced by the IP address which the DHCP server has assigned. After clicking “ Apply ” button, a popup dialog will show up to inform you when the DHCP client is enabling. The current IP will lose and you should find the new IP on the DHCP server.
IP Address	Assign the IP address that the network is using. If DHCP client function is enabling, you do not need to assign the IP address. The network DHCP server will assign the IP address for the

	switch and it will be displayed in this column. The default IP is 192.168.10.1
Subnet Mask	Assign the subnet mask for the IP address. If DHCP client function is enabling, you do not need to assign the subnet mask.
Gateway	Assign the network gateway for the switch. The default gateway is 192.168.10.254
DNS1	Assign the primary DNS IP address
DNS2	Assign the secondary DNS IP address
Apply	Click " Apply " to activate the configurations.

5.1.2.4 SNTP Configuration

The SNTP (Simple Network Time Protocol) settings allow you to synchronize switch clocks in the Internet.

SNTP Configuration interface

The following table describes the labels in this screen.

Label	Description
SNTP Client	Enable or disable SNTP function to get the time from the SNTP server.
Daylight Saving Time	Enable or disable daylight saving time function. When daylight saving time is enabling, you need to configure the daylight saving time period.
UTC Time zone	Set the switch location time zone. The following table lists the different location time zone for your reference.

Local Time Zone	Conversion from UTC	Time at 12:00 UTC
November Time Zone	- 1 hour	11 am
Oscar Time Zone	-2 hours	10 am
ADT - Atlantic Daylight	-3 hours	9 am
AST - Atlantic Standard EDT - Eastern Daylight	-4 hours	8 am
EST - Eastern Standard CDT - Central Daylight	-5 hours	7 am
CST - Central Standard MDT - Mountain Daylight	-6 hours	6 am
MST - Mountain Standard PDT - Pacific Daylight	-7 hours	5 am
PST - Pacific Standard ADT - Alaskan Daylight	-8 hours	4 am
ALA - Alaskan Standard	-9 hours	3 am
HAW - Hawaiian Standard	-10 hours	2 am
Nome, Alaska	-11 hours	1 am
CET - Central European FWT - French Winter MET - Middle European MEWT - Middle European Winter SWT - Swedish Winter	+1 hour	1 pm
EET - Eastern European, USSR Zone 1	+2 hours	2 pm
BT - Baghdad, USSR Zone 2	+3 hours	3 pm
ZP4 - USSR Zone 3	+4 hours	4 pm
ZP5 - USSR Zone 4	+5 hours	5 pm

ZP6 - USSR Zone 5	+6 hours	6 pm
WAST - West Australian Standard	+7 hours	7 pm
CCT - China Coast, USSR Zone 7	+8 hours	8 pm
JST - Japan Standard, USSR Zone 8	+9 hours	9 pm
EAST - East Australian Standard GST Guam Standard, USSR Zone 9	+10 hours	10 pm
IDLE - International Date Line NZST - New Zealand Standard NZT - New Zealand	+12 hours	Midnight

The following table describes the labels in this screen.

Label	Description
SNTP Sever IP Address	Set the SNTP server IP address.
Daylight Saving Period	Set up the Daylight Saving beginning time and Daylight Saving ending time. Both will be different each year.
Daylight Saving Offset	Set up the offset time.
Switch Timer	Display the switch current time.
Apply	Click " Apply " to activate the configurations.

5.1.2.5 Backup & Restore

You can save current EEPROM value of the switch to TFTP server, then go to the TFTP restore configuration page to restore the EEPROM value.

The screenshot displays the 'Backup & Restore' interface. It is divided into two main sections: 'Restore Configuration' and 'Backup Configuration'. Both sections have a 'TFTP Server IP Address' field set to '192.168.10.66' and a file name field. The 'Restore' section has a 'Restore File Name' field set to 'data.bin' and buttons for 'Restore' and 'Help'. The 'Backup' section has a 'Backup File Name' field set to 'data.bin' and buttons for 'Backup' and 'Help'.

Backup & Restore interface

The following table describes the labels in this screen.

Label	Description
TFTP Server IP Address	Fill in the TFTP server IP
Restore File Name	Fill the file name.
Restore	Click “ restore ” to restore the configurations.
Restore File Name	Fill the file name.
Restore	Click “ restore ” to restore the configurations.
Backup	Click “ backup ” to backup the configurations.

5.1.2.6 Upgrade Firmware

Upgrade Firmware allows you to update the switch firmware. Before updating, make sure you have your TFTP server ready and the firmware image is on the TFTP server.

The screenshot shows the 'Upgrade Firmware' interface. It contains two input fields: 'TFTP Server IP' with the value '192.168.10.66' and 'Firmware File Name' with the value 'image.bin'. Below these fields are two buttons: 'Upgrade' and 'Help'.

Update Firmware interface

5.1.2.7 Factory Default




The screenshot shows a web interface titled "Factory Default". It contains two checkboxes, both of which are checked: "Keep current IP address setting?" and "Keep current username & password?". Below these checkboxes are two buttons: "Reset" and "Help".

Factory Default interface

Reset switch to default configuration. Click **Reset** to reset all configurations to the default value. You can select "**Keep current IP address setting**" and "**Keep current username & password**" to prevent IP and username & password from default.

5.1.2.8 System Reboot

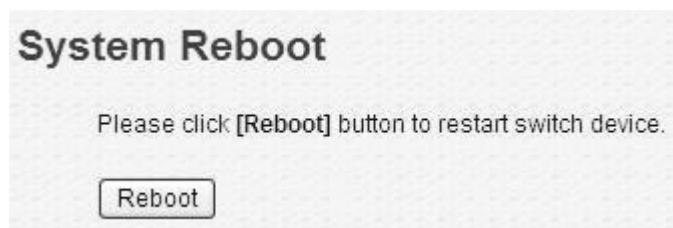

The screenshot shows a web interface titled "System Reboot". It contains a text prompt: "Please click [Reboot] button to restart switch device." Below this text is a single button labeled "Reboot".

System Reboot interface

5.1.3 Port Configuration

5.1.3.1 Port Control

By this function, you can set the state, speed/duplex, flow control, and security of the port.

Port No.	State	Speed/Duplex	Flow Control
Port.01	Enable	AutoNegotiation	Disable
Port.02	Enable	AutoNegotiation	Disable
Port.03	Enable	AutoNegotiation	Disable
Port.04	Enable	AutoNegotiation	Disable
Port.05	Enable	AutoNegotiation	Disable
Port.06	Enable	AutoNegotiation	Disable

Apply Help

Port Control interface

The following table describes the labels in this screen.

Label	Description
Port NO.	Port number for setting.
State	Enable/Disable the port.
Speed/Duplex	You can set Auto-negotiation, 100 full,100 half,10 full,10 half mode.
Flow Control	Support symmetric and asymmetric mode to avoid packet loss when congestion occurred.
Apply	Click “ Apply ” to activate the configurations.

5.1.3.2 Port Status

The following information provides the current port status.

Port No.	Type	Link	State	Speed/Duplex	Flow Control
Port.01	100TX	Down	Enable	N/A	N/A
Port.02	100TX	Down	Enable	N/A	N/A
Port.03	100TX	UP	Enable	100 Full	Disable
Port.04	100TX	Down	Enable	N/A	N/A
Port.05	100TX	Down	Enable	N/A	N/A
Port.06	100TX	Down	Enable	N/A	N/A


Port Status interface

5.1.4 Redundancy

5.1.4.1 Fast Recovery Mode

The Fast Recovery Mode can be set to connect multiple ports to one or more switches.

The LNP-602N with its fast recovery mode will provide redundant links. Fast Recovery mode supports 4 priorities, only the first priority will be the act port, the other ports configured with other priority will be the backup ports.

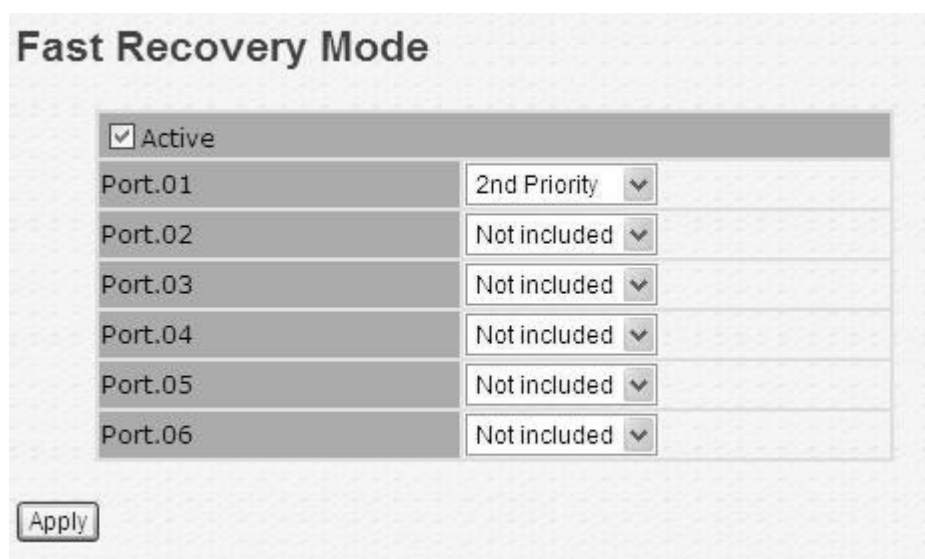

The screenshot shows the 'Fast Recovery Mode' configuration window. At the top, there is a checkbox labeled 'Active' which is checked. Below this is a table with six rows, each representing a port from Port.01 to Port.06. Each row has a dropdown menu to its right. Port.01 is set to '2nd Priority', while Ports 02 through 06 are all set to 'Not included'. At the bottom left of the window is an 'Apply' button.

Fast Recovery Mode	
☒ Active	
Port.01	2nd Priority ▼
Port.02	Not included ▼
Port.03	Not included ▼
Port.04	Not included ▼
Port.05	Not included ▼
Port.06	Not included ▼
Apply	

Fast Recovery Mode interface

The following table describes the labels in this screen.

Label	Description
Active	Activate the fast recovery mode.
port	Port can be configured as 5 priorities. Only the port with highest priority will be the active port. 1st Priority is the highest.
Apply	Click " Apply " to activate the configurations.

5.1.4.2 Redundant Ring

The recovery time of Redundant Ring is less than 10 mS over 250 units of connections.

It can reduce unexpected malfunction caused by network topology change. Redundant Ring technology supports three Ring topologies for network redundancy: Redundant Ring, Coupling Ring and Dual Homing.

Redundant Ring

☒ Redundant Ring
 ☐ Coupling Ring
 ☐ Dual Homing

Ring Master: Enable
 Coupling Port: Port.03
 Homing Port: Port.05

1st Ring Port: Port.03
 2nd Ring Port: Port.04

This switch is Master Switch.

Apply
Help

Redundant Ring interface

The following table describes the labels in this screen.

Label	Description
Redundant Ring	Mark to enable Ring.
Ring Master	There should be one and only one Ring Master in a ring. However if there are two or more switches which set Ring Master to enable, the switch with the lowest MAC address will be the actual Ring Master and others will be Backup Masters.
1st Ring Port	The primary port, when this switch is Ring Master.
2nd Ring Port	The backup port, when this switch is Ring Master.
Coupling Ring	Mark to enable Coupling Ring. Coupling Ring can be used to divide a big ring into two smaller rings to avoid effecting all switches when network topology change. It is a good application for connecting two Redundant Rings.
Coupling Port	Link to Coupling Port of the switch in another ring. Coupling Ring need four switch to build an active and a backup link. Set a port as coupling port. The coupled four ports of four switches will be run at active/backup mode.
Control Port	Link to Control Port of the switch of the same ring. Control Port used to transmit control signals.
Dual Homing	Mark to enable Dual Homing. By selecting Dual Homing mode, Redundant Ring will be connected to normal switches through

	two RSTP links (ex: backbone Switch). The two links work as active/backup mode, and connect each Redundant Ring to the normal switches in RSTP mode.
Apply	Click “ Apply ” to activate the configurations.

Note: We don't suggest you to set one switch as a Ring Master and a Coupling Ring at the same time due to heavy load.

5.1.4.3 RSTP

The Rapid Spanning Tree Protocol (RSTP) is an evolution of the Spanning Tree Protocol. It provides faster spanning tree convergence after a topology change. The system also supports STP and the system will auto detect the connected device that is running STP or RSTP protocol.

RSTP setting

You can enable/disable the RSTP function, and set the parameters for each port.

RSTP Setting

RSTP Mode

Enable ▾

Bridge Configuration

Priority (0-61440)	32768
Max Age Time(6-40)	20
Hello Time (1-10)	2
Forward Delay Time (4-30)	15

Port Configuration

Port	Path Cost (1-2000000000)	Priority (0-240)	Admin P2P	Admin Edge	Admin Non STP
1	200000	128	Auto ▾	True ▾	False ▾
2	200000	128	Auto ▾	True ▾	False ▾
3	200000	128	Auto ▾	True ▾	False ▾
4	200000	128	Auto ▾	True ▾	False ▾
5	200000	128	Auto ▾	True ▾	False ▾
6	200000	128	Auto ▾	True ▾	False ▾

Apply

Help

RSTP Setting interface

The following table describes the labels in this screen.

Label	Description
RSTP mode	You must enable or disable RSTP function before configuring the related parameters.
Priority (0-61440)	A value used to identify the root bridge. The bridge with the lowest value has the highest priority and is selected as the root. If the value changes, you must reboot the switch. The value must be multiple of 4096 according to the protocol standard rule.
Max Age (6-40)	The number of seconds a bridge waits without receiving Spanning-tree Protocol configuration messages before attempting a reconfiguration. Enter a value between 6 through 40.
Hello Time (1-10)	The time that controls switch sends out the BPDU packet to check RSTP current status. Enter a value between 1 through 10.
Forwarding Delay Time (4-30)	The number of seconds a port waits before changing from its Rapid Spanning-Tree Protocol learning and listening states to the forwarding state. Enter a value between 4 through 30.
Path Cost (1-200000000)	The cost of the path to the other bridge from this transmitting bridge at the specified port. Enter a number 1 through 200000000.
Priority (0-240)	Decide which port should be blocked by priority in LAN. Enter a number 0 through 240. The value of priority must be the multiple of 16
Admin P2P	Some of the rapid state transactions that are possible within RSTP are dependent upon whether the port concerned can only be connected to exactly one other bridge (i.e. It is served by a point-to-point LAN segment), or it can be connected to two or more bridges (i.e. It is served by a shared medium LAN segment). This function allows the P2P status of the link to be manipulated administratively. True means P2P enabling. False means P2P disabling.
Admin Edge	The port is directly connected to end stations, and it cannot create bridging loop in the network. To configure the port as an edge port, set the port to "True".
Admin Non STP	The port includes the STP mathematic calculation. True is not including STP mathematic calculation. False is including the STP mathematic calculation.

Apply

Click "**Apply**" to activate the configurations.

NOTE: Follow the rule to configure the MAX Age, Hello Time, and Forward Delay Time:

$$2 \times (\text{Forward Delay Time value} - 1) \geq \text{Max Age value} \geq 2 \times (\text{Hello Time value} + 1)$$

RSTP Information

Show RSTP algorithm result at this table.

RSTP Information

Root Bridge Information

Bridge ID	0080001245874125
Root Priority	32768
Root Port	Root
Root Path Cost	0
Max Age Time	20
Hello Time	2
Forward Delay Time	15

Port Information

Port	Path Cost	Port Priority	OperP2P	OperEdge	STP Neighbor	State	Role
Port.01	200000	128	True	True	False	Disabled	Disabled
Port.02	200000	128	True	True	False	Disabled	Disabled
Port.03	200000	128	True	True	False	Forwarding	Designated
Port.04	200000	128	True	True	False	Disabled	Disabled
Port.05	200000	128	True	True	False	Disabled	Disabled
Port.06	200000	128	True	True	False	Disabled	Disabled


RSTP Information interface

5.1.5 SNMP Configuration

Simple Network Management Protocol (SNMP) is the protocol developed to manage nodes (servers, workstations, routers, switches and hubs etc.) on an IP network. SNMP enables network administrators to manage network performance, find and solve network problems, and plan for network growth. Network management systems learn of problems by receiving traps or change notices from network devices implementing SNMP.

5.1.5.1 SNMP – Agent Setting

You can set SNMP agent related information by Agent Setting Function.

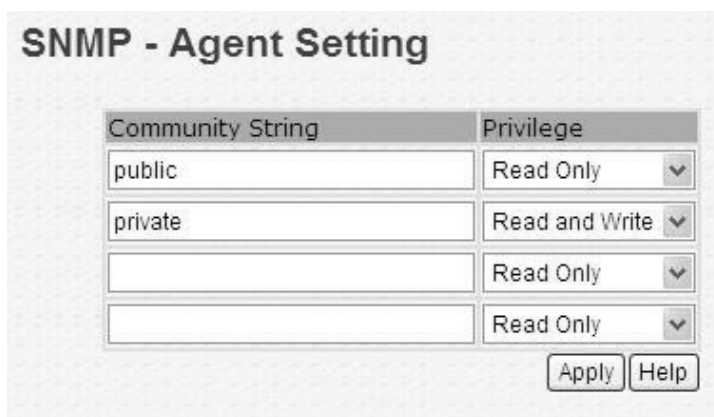

The image shows the 'SNMP - Agent Setting' interface. It features a table with two columns: 'Community String' and 'Privilege'. There are four rows in the table. The first row has 'public' in the Community String field and 'Read Only' in the Privilege dropdown. The second row has 'private' in the Community String field and 'Read and Write' in the Privilege dropdown. The third and fourth rows have empty Community String fields and 'Read Only' in the Privilege dropdown. Below the table are 'Apply' and 'Help' buttons.

Community String	Privilege
public	Read Only
private	Read and Write
	Read Only
	Read Only

Apply Help


SNMP – Agent Setting interface

The following table describes the labels in this screen.

Label	Description
SNMP – Agent Setting	SNMP Community should be set for SNMP. Four sets of "Community String/Privilege" are supported. Each Community String is maximum 32 characters. Keep empty to remove this Community string.

5.1.5.2 SNMP –Trap Setting

A trap manager is a management station that receives traps, the system alerts generated by the switch. If no trap manager is defined, no traps will issue. Create a trap manager by entering the IP address of the station and a community string. To define management stations as trap manager and enter SNMP community strings and selects the SNMP version.

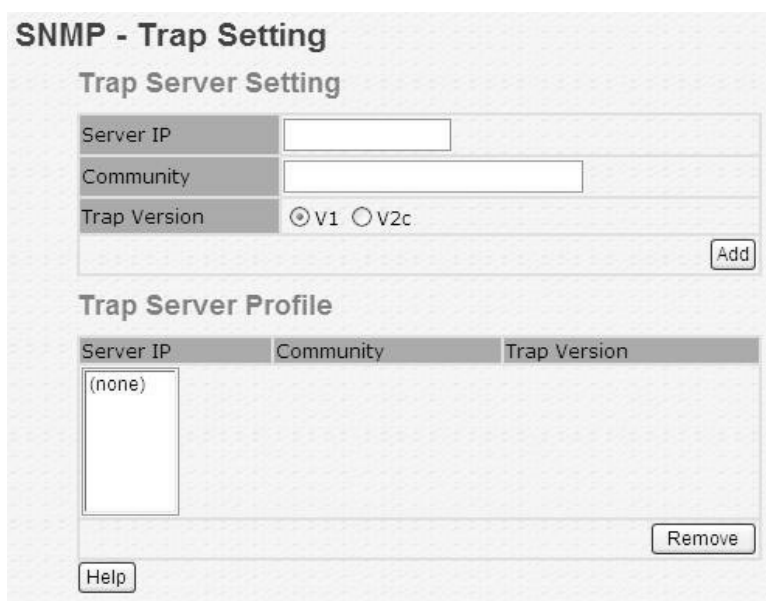

The image shows the 'SNMP - Trap Setting' interface. It has two main sections: 'Trap Server Setting' and 'Trap Server Profile'. The 'Trap Server Setting' section has fields for 'Server IP', 'Community', and 'Trap Version' (with radio buttons for v1 and v2c). There is an 'Add' button. The 'Trap Server Profile' section has a table with columns 'Server IP', 'Community', and 'Trap Version'. The first row has '(none)' in the Server IP field. There is a 'Remove' button and a 'Help' button at the bottom.

SNMP - Trap Setting

Trap Server Setting

Server IP:

Community:

Trap Version: ☒ v1 ☐ v2c

Add

Trap Server Profile

Server IP	Community	Trap Version
(none)		

Remove

Help

SNMP –Trap Setting interface

The following table describes the labels in this screen.

Label	Description
Server IP	The server IP address to receive Trap
Community	Community for authentication
Trap Version	Trap Version supports V1 and V2c.
Add	Add trap server profile.
Remove	Remove trap server profile.
Help	Show help file.

5.1.6 VLAN

A Virtual LAN (VLAN) is a logical network grouping that limits the broadcast domain, which allows you to isolate network traffic. Only the members of the VLAN will receive traffic from the same members of VLAN. Basically, creating a VLAN from a switch is logically equivalent of reconnecting a group of network devices to another Layer 2 switch. However, all the network devices are still plugged into the same switch physically.

The switch supports port-based VLAN only.

5.1.6.1 VLAN Configuration – Port Based

Packets can go among only members of the same VLAN group. Note all unselected ports are treated as belonging to another single VLAN. If the port-based VLAN enabled, the VLAN-tagging is ignored.

	Port.01	Port.02	Port.03	Port.04	Port.05	Port.06
Group.1	☐	☐	☐	☐	☐	☐
Group.2	☐	☐	☐	☐	☐	☐
Group.3	☐	☐	☐	☐	☐	☐
Group.4	☐	☐	☐	☐	☐	☐
Group.5	☐	☐	☐	☐	☐	☐
Group.6	☐	☐	☐	☐	☐	☐

Apply Help

VLAN Configuration – Port Based VLAN interface

The following table describes the labels in this screen.

Label	Description
Group	Mark the blank to assign the port into VLAN group.
Apply	Click “ Apply ” to activate the configurations.
Help	Show help file.

5.1.7 Warning

Warning function is very important for managing switch. You can manage switch by SYSLOG, E-MAIL, and Fault Relay. It helps you to monitor the switch status on remote site. When events occurred, the warning message will send to your appointed server, E-MAIL, or relay fault to switch panel.

5.1.7.1 Fault Alarm

When any selected fault event is happened, the Fault LED in switch panel will light up and the electric relay will signal at the same time.



Fault alarm interface

System Warning – SYSLOG Setting

The SYSLOG is a protocol to transmit event notification messages across networks. Please refer to RFC 3164 - The BSD SYSLOG Protocol


System Warning – SYSLOG Setting interface

The following table describes the labels in this screen.

Label	Description
SYSLOG Mode	■ Disable: disable SYSLOG. ■ Client Only: log to local system. ■ Server Only: log to a remote SYSLOG server. ■ Both: log to both of local and remote server.
SYSLOG Server IP Address	The remote SYSLOG Server IP address.
Apply	Click “ Apply ” to activate the configurations.
Help	Show help file.

System Event LOG

If system log client is enabled, the system event logs will show in this table.

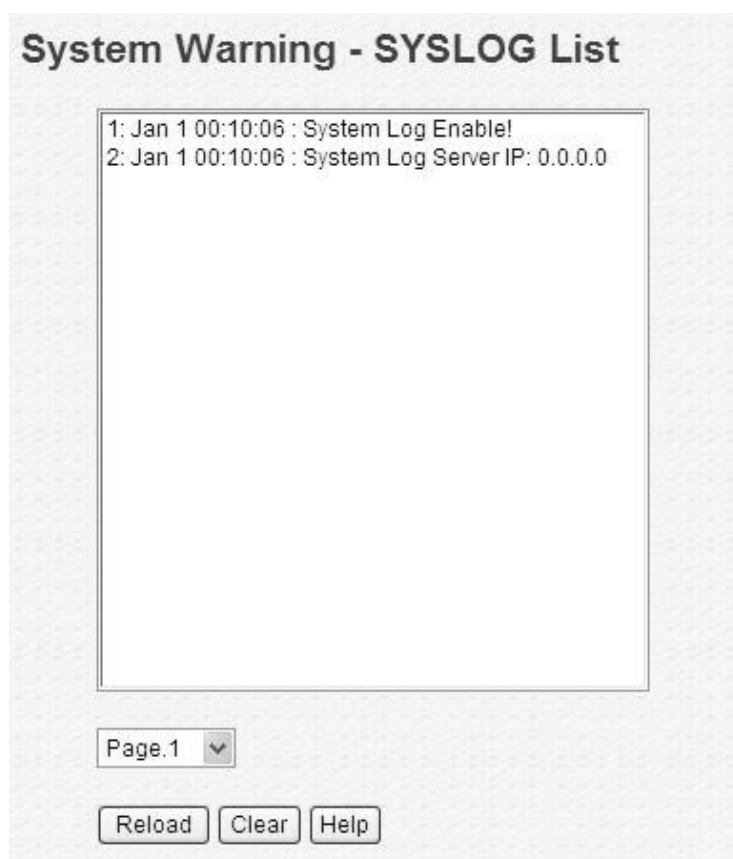

System event log interface

The following table describes the labels in this screen.

Label	Description
Page	Select LOG page.
Reload	To get the newest event logs and refresh this page.
Clear	Clear log.
Help	Show help file.

System Warning – SMTP Setting

The SMTP is Short for Simple Mail Transfer Protocol. It is a protocol for e-mail transmission across the Internet. Please refer to RFC 821 - Simple Mail Transfer Protocol.

System Warning - SMTP Setting

E-mail Alert : Enable

SMTP Configuration

SMTP Server IP Address: 0.0.0.0

Sender E-mail Address:

Mail Subject: Automated Email Alert

☐ Authentication

Recipient E-mail Address 1:

Recipient E-mail Address 2:

Recipient E-mail Address 3:

Recipient E-mail Address 4:

Apply Help

System Warning – SMTP Setting interface

The following table describes the labels in this screen.

Label	Description
E-mail Alarm	Enable/Disable transmission system warning events by e-mail.
Sender E-mail Address	The SMTP server IP address
Mail Subject	The Subject of the mail
Authentication	■ Username: the authentication username. ■ Password: the authentication password. ■ Confirm Password: re-enter password.
Recipient E-mail Address	The recipient's E-mail address. It supports up to 6 recipients per mail.
Apply	Click " Apply " to activate the configurations.
Help	Show help file.

System Warning – Event Selection

SYSLOG and SMTP are the two warning methods that supported by the system.

Check the corresponding box to enable system event warning method you wish to choose. Please note that the checkbox can not be checked when SYSLOG or SMTP is disabled.

System Warning - Event Selection

System Event

Event	SYSLOG	SMTP
System Cold Start	☒	☐
O-Ring Topology Change	☐	☐

Port Event

Port No.	SYSLOG	SMTP
Port.01	Disable	Disable
Port.02	Disable	Disable
Port.03	Disable	Disable
Port.04	Disable	Disable
Port.05	Disable	Disable
Port.06	Disable	Disable

Apply Help


System Warning – Event Selection interface

The following table describes the labels in this screen.

Label	Description
System Event	
System Cold Start	Alert when system restart
Redundant Ring Topology Change	Alert when Redundant Ring topology change
Port Event	■ Disable ■ Link Up ■ Link Down ■ Link Up & Link Down
Apply	Click “ Apply ” to activate the configurations.
Help	Show help file.

5.1.8 Front Panel


Show LNP-602N panel. Click “Close” to close panel on web.

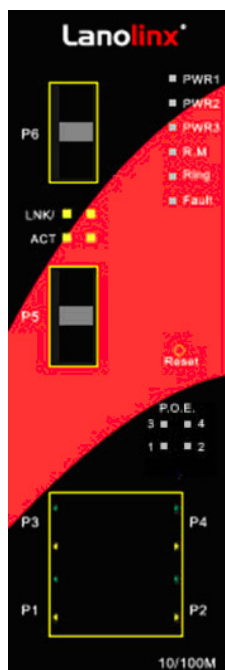

Front panel interface

5.1.9 Save Configuration

If any configuration changed, “Save Configuration” should be clicked to save current configuration data into the permanent flash memory. Otherwise, the current configuration will be lost when power off or system reset.

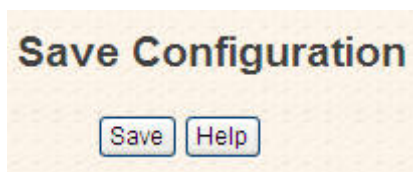

System Configuration interface

The following table describes the labels in this screen.

Label	Description
Save	Save all configurations.
Help	Show help file.

5.1.10 LLDP

LLDP (Link Layer Discovery Protocol) function allows the switch to advertise its information to other nodes on the network and store the information it discovers.

LLDP interface

The following table describes the labels in this screen.

Label	Description
LLDP Protocol	“Enable” or “Disable” LLDP function.
LLDP Interval	The interval of resend LLDP (by default at 30 seconds)
Apply	Click “ Apply ” to activate the configurations.
Help	Show help file.

5.1.11 Power over Ethernet (P.O.E.)

The following interface is the PoE setting interface. There are 4 ports (port 1 to port 4) act as PSE (Power Supply Equipment) ports.

Power over Ethernet

Maximum Power Available	120 W
Actual Power Consumption	0 W
Port Knockoff Disabled	☒
AC Disconnect	☒
Capacitive Detection	☐

Apply

The following table describes the labels in this screen.

Label	Description
Maximum Power Available	Display the maximum power available.
Actual Power Consumption	Display the actual power consumption.
Port Knockoff Disabled	Mark the blank to enable "Pork Knock off Disabled" function.
AC Disconnect	Mark the blank to enable "AC Disconnect" function.
Capacitive Detection	Mark the blank to enable "Capacitive Detection" function
Apply	Click "Apply" to set the configurations.

Port	Enable State	Power Limit From Classification	Legacy	Priority	Power Limit (<25000) (mW)	Mode	Current (mA)	Voltage (V)	Power (mW)	Determined Class
1	☒	☐	☐	Low	15400	Null	0	0.0	0	0:15.4W
2	☒	☐	☐	Low	15400	Detecting	0	0.0	0	0:15.4W
3	☒	☐	☐	Low	15400	Detecting	0	0.0	0	0:15.4W
4	☒	☐	☐	Low	15400	Detecting	0	0.0	0	0:15.4W

P.S.E. port control setting interface

The following table describes the labels in this screen.

Label	Description
Port	Port number.
Enable state	Mark the blank to enable P.O.E. function for specific ports
Power Limit From Classification	Set the "Power Limit From Classification" function for each P.O.E. ports
Legacy	The legacy detection is to identify the PD devices that did not follow the IEEE 802.3af standard their unique electrical signatures in order for the PoE switch can provide the power to those PD devices
Priority	Set port priority for the P.O.E. power management. 1 = C (critical), 2 = H (High), 3 = L (Low)
Power Limit	Set the power limit value. The maximum value must less 15400
Mode	Display the PD current operation mode status
Current(mA)	Display current value
Voltage(V)	Display voltage value

Power(mW)	Display watt value
Determined Class	Display power class. When the Bypass classification enable, the class value will not show in here
Apply	Click " Apply " to set the configurations.

5.1.12 Auto-Ping Check

You can control the POE function by using the ping command, in order to turn on or off other POE device which connect with port assign.

Auto-Ping Check

Ping Check: ▼

Send Mail : ▼

Port	Ping IP Address	Interval time	Retry Time	Failure Action
1	0.0.0.0	30 sec(s)	3	Nothing ▼
2	0.0.0.0	30 sec(s)	3	Nothing ▼
3	0.0.0.0	30 sec(s)	3	Nothing ▼
4	0.0.0.0	30 sec(s)	3	Nothing ▼

The following table describes the labels in this screen.

Label	Description
Ping Check	Enable or disable Ping Check function
Send Mail	When " ping " fails, it can notify users by mail
Port	You can appoint to want to control P.O.E port number
Ping IP Address	Set up IP Address
Interval Time	Spacing interval to set up Ping
Retry Time	Set up the number of times of ping
Failure Action	Set up movements wanted to carry out

5.1.13 Schedule

User can appointed date and time, Enable or Close Power Over Ethernet Function,

switch can with according to the time when is set up, carry on the designated movements (SNTP Function must Enable)

Power over Ethernet - Schedule

Schedule on
Port.01

Schedule mode
Disable

☐ Select all

Hour	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
00	☒	☒	☒	☒	☒	☒	☒
01	☒	☒	☒	☒	☒	☒	☒
02	☒	☒	☒	☒	☒	☒	☒
03	☒	☒	☒	☒	☒	☒	☒
04	☒	☒	☒	☒	☒	☒	☒
05	☒	☒	☒	☒	☒	☒	☒
06	☒	☒	☒	☒	☒	☒	☒
07	☒	☒	☒	☒	☒	☒	☒
08	☒	☒	☒	☒	☒	☒	☒
09	☒	☒	☒	☒	☒	☒	☒
10	☒	☒	☒	☒	☒	☒	☒
11	☒	☒	☒	☒	☒	☒	☒
12	☒	☒	☒	☒	☒	☒	☒
13	☒	☒	☒	☒	☒	☒	☒
14	☒	☒	☒	☒	☒	☒	☒
15	☒	☒	☒	☒	☒	☒	☒
16	☒	☒	☒	☒	☒	☒	☒
17	☒	☒	☒	☒	☒	☒	☒
18	☒	☒	☒	☒	☒	☒	☒
19	☒	☒	☒	☒	☒	☒	☒
20	☒	☒	☒	☒	☒	☒	☒
21	☒	☒	☒	☒	☒	☒	☒
22	☒	☒	☒	☒	☒	☒	☒
23	☒	☒	☒	☒	☒	☒	☒

Apply

NOTE:SNTP must enable.

The following table describes the labels in this screen.

Label	Description
Schedule on	Setting action port
Schedule mode	Schedule mode enable or disable
Select all	Select all Data & Time
Hour	Set up enable Time
Sunday ~ Saturday	Set up enable Data

Technical Specifications

Technology	
Ethernet Standards	IEEE802.3 10BASE-T IEEE802.3u 100BASE-TX IEEE802.3x Flow Control and Back pressure IEEE802.3af Power over Ethernet specification IEEE802.1D Spanning tree protocol IEEE802.1w Rapid Spanning tree protocol IEEE802.1AB LLDP
MAC addresses	1024
Flow Control	IEEE 802.3x Flow Control and Back-pressure
VLAN	Port based
Processing	Store-and-Forward
Firmware upgrade	TFTP
Ring redundancy	RSTP Redundant Ring Couple Ring Dual Homing Fast recovery
Interface	
RJ45 Ports	10/100Base-T(X), Auto MDI/MDI-X (4x P.O.E. PSE)
Fiber Ports	100 Base-FX(SC Connector) Multi-Mode: 0 to 2 km, 1310 nm (50/125 µm to 62.5/125 µm) Single-Mode: 0 to 30 km, 1310 nm (9/125 µm)
LED Indicators	Per Unit : Power x 3(Green) RJ45 Ports: Per Port : Link/Activity(Green/Blinking Green), Full duplex(Amber) P.O.E. LED: P.O.E. power supplied(Green) Fiber Ports: Per Port : Activity(Green), Link (Amber)
Power Requirements	
Power Input Voltage	PWR1/2: +48V DC in 7 pin Terminal block

	PWR3: +48VDC in Power Jack
Reverse Polarity Protection	Present
Power Consumption	7 Watts (Power supplied for PD not included)
Environmental	
Wide Operating Temperature	-40 to 70°C
Storage Temperature	-40 to 85°C
Operating Humidity	5% to 95%, non-condensing
Mechanical	
Dimensions(W x D x H)	52 mm(W)x 106 mm(D)x 144 mm(H)
Casing	IP-30 protection
Regulatory Approvals	
Regulatory Approvals	FCC Part 15, CISPER (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS)
Shock	IEC 60068-2-27
Free Fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
Warranty	5 years